

LOW PROFILE DIFFUSERS

Standard Construction:


1. Double Deflection grill with vertical & horizontal adjustment
2. Turning vane in each quadrant
3. G-90 Galvanized steel construction
4. 1", 1 1/2lb. internal insulation
5. Standard TDC connection
6. 3/8" threaded insert in each corner for mounting
7. Custom configurations available

RPLD2-* - 2 WAY THROW

(* = Grill size)

Standard Features:

Two Grill arrangement as required

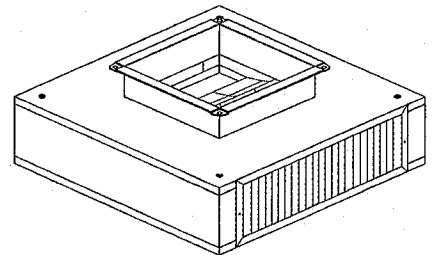


RPLD3-* - 3 WAY THROW

(* = Grill size)

Standard Features:

Three grill arrangement as required

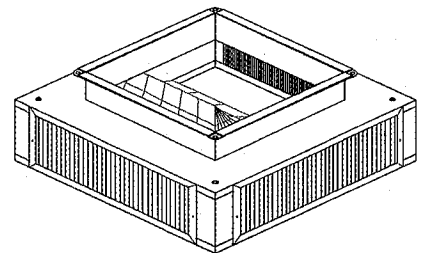


RPLD4-* - 4 WAY THROW

(* = Grill size)

Standard Features:

Four grill arrangement

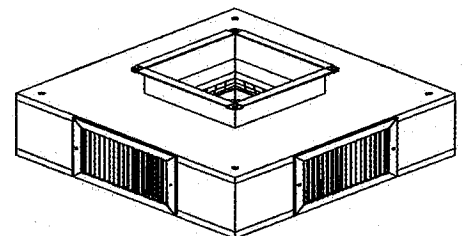

RPLD6-* - 6 WAY THROW

(* = Grill size)

Standard Features:

Six grill arrangement

