

Model: RPCF-1SR Square to Round Counterflashing

Standard Construction:

20ga. Galvanized steel construction, .050 Aluminum optional.
One or Two piece construction. Cross Broken and Sloped
for water run-off. All welds are micro-sealed and prime
painted after fabrication.

☐ ALUMINUM ☐ GALVANIZED


☐ ONE PIECE ☐ TWO PIECE

Added Options (When Required):


RPI Job #: -

Project: _____


Architect: _____

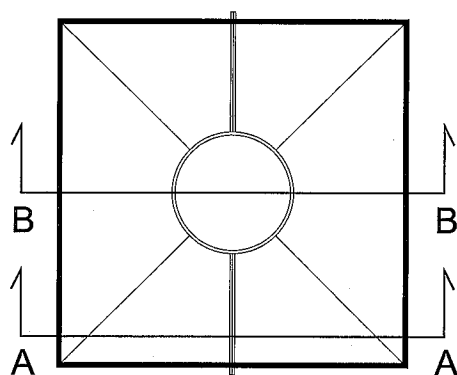


PLAN



SECTION A-A

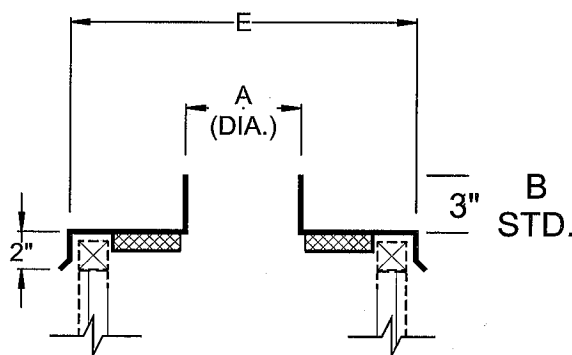

SECTION B-B

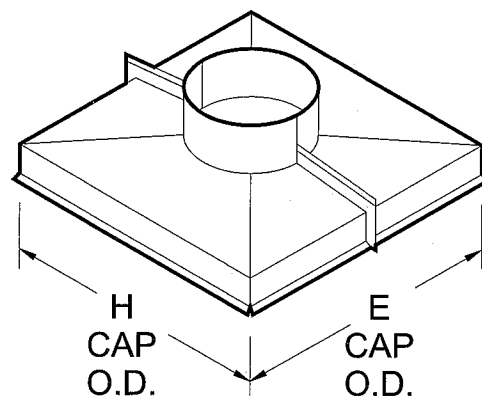

ISOMETRIC

Qty.	A (Dia.)	B	E	H	Tag: