

Model: RPEJ-1, 2, 3 CORNERS (OUTSIDE)

Standard Construction:


20ga. Galvanized steel construction with 2 X 2 pressure-treated wood nailers; 1 1/2" thick 3# density rigid insulation; internal vertical reinforcing; mounting flanges; All welds micro-sealed and prime painted after fabrication.

Added Options (When Required):


RPI Job #: -

Project: _____


Architect: _____

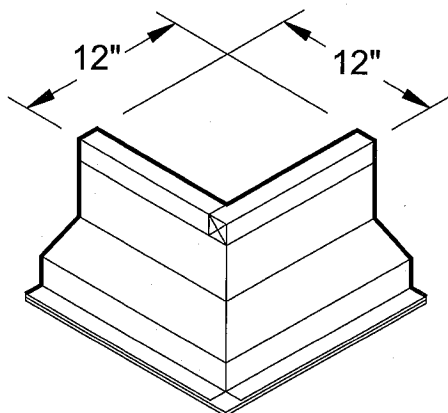


ISOMETRIC VIEW
RPEJ-1
OUTSIDE CORNER

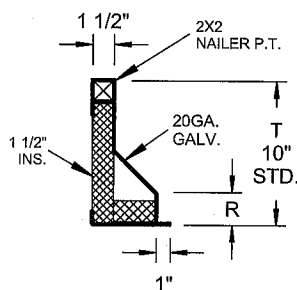


RPEJ-1 SECTION

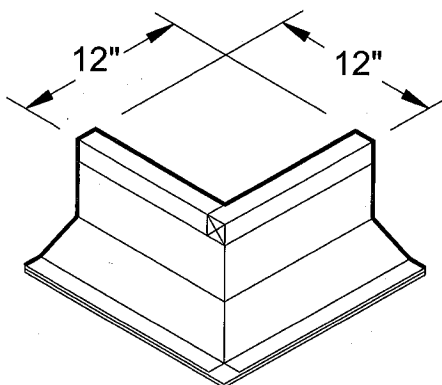


ISOMETRIC VIEW
RPEJ-2
OUTSIDE CORNER

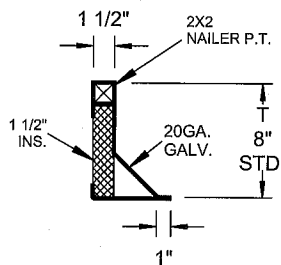

RPEJ-2 SECTION

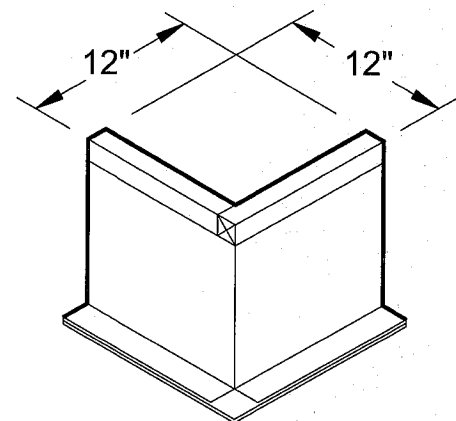

ISOMETRIC VIEW
RPEJ-3
OUTSIDE CORNER

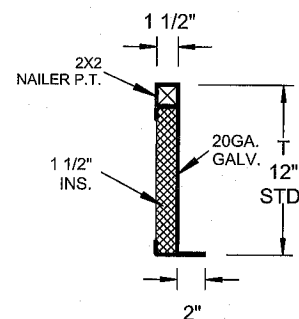

RPEJ-3 SECTION

QTY.	MODEL	T	R	TAG:
	RPEJ-			
	RPEJ-			
	RPEJ-			
	RPEJ-			
	RPEJ-			