

Model: RPEJ-1, 2, 3 INSIDE CORNERS (LEFT AND RIGHT WITH VARIABLE HEIGHTS)

Standard Construction:


20ga. Galvanized steel construction with 2 X 2 pressure-treated wood nailers; 1 1/2" thick 3# density rigid insulation; internal vertical reinforcing; mounting flanges; All welds micro-sealed and prime painted after fabrication.

Added Options (When Required):


RPI Job #: -

Project: _____


Architect: _____

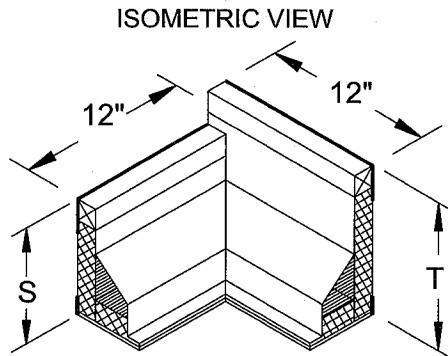


RPEJ-1
LEFT INSIDE CORNER (L.I.C.)

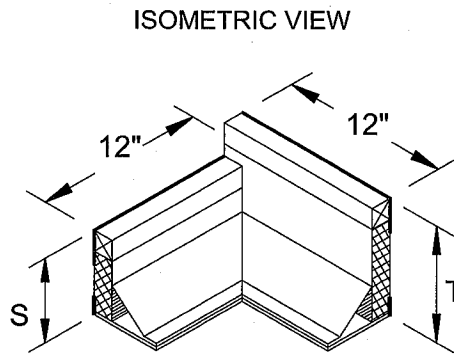


RPEJ-2
LEFT INSIDE CORNER (L.I.C.)

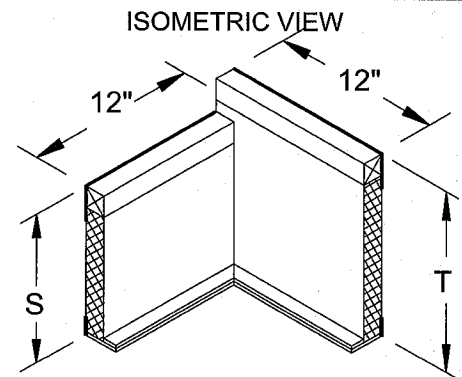


RPEJ-3
LEFT INSIDE CORNER (L.I.C.)

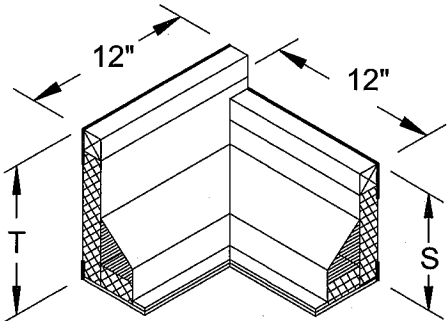


RPEJ-1
RIGHT INSIDE CORNER (R.I.C.)

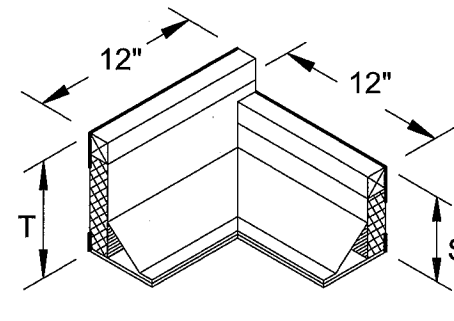


RPEJ-2
RIGHT INSIDE CORNER (R.I.C.)

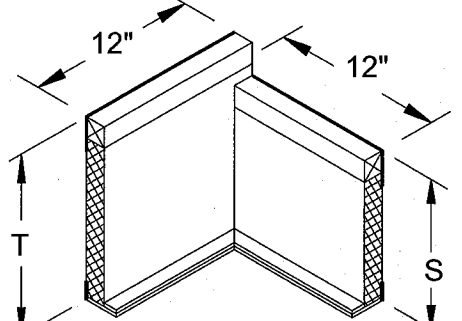


RPEJ-3
RIGHT INSIDE CORNER (R.I.C.)

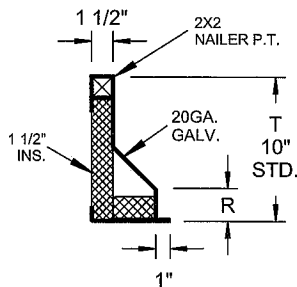

RPEJ-1 SECTION

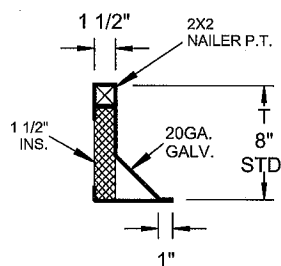

RPEJ-2 SECTION

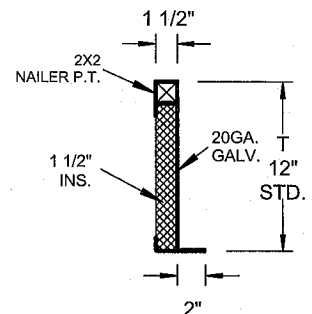

RPEJ-3 SECTION

QTY. L.I.C.	QTY. R.I.C.	MODEL	S	T	R	TAG:
		RPEJ -				
		RPEJ -				